


COMPENSATED NEUTRON TOOL - PTX - 2 3/4 IN.

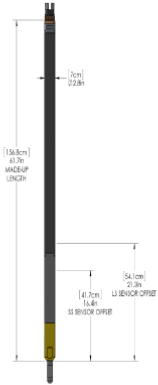

SKU: 050-CN275-WSBL

Categories: [Cased Hole Wireline](#), [Formation Evaluation](#), [Neutron](#), [PTX](#)

PRODUCT DESCRIPTION

Ratings & Dimensions

Max Temperature	350°F (177°C) for 4 hours
Maximum Pressure	20,000 psi (138 MPa)
Outer Diameter	2.75 in (69.9 mm)
Length	61.68 in (1566.67 mm)
Weight	60 lb. (27.2 kg)
Min Csg/Tbg OD	4.5 in (115.0 mm)
Max Csg/Tbg OD	9.63 in (244.60 mm)
Tensile Strength¹	Tension: 15,000 lb Compression: 15,000 lb
Measure Points	Torque: 150 ft-lb
	Near Detector (SS): 16.32 in (414.53 mm)
	Far Detector (LS): 21.36 in (542.54 mm)

Borehole Conditions

Borehole Fluids	Salt, Fresh and Oil
Logging Speed	Recommended: 35 ft/min (10.0 m/min)
Tool Positioning	Maximum: 60 ft/min (18.2 m/min)
	Centralized Eccentralized

Hardware Characteristics

Source Type	15 Curie Am ²⁴¹ Be Neutron Emitter
Sensor Type	One He ³ Gas Detector Tube each
Sensor Spacing	Near Detector (SS): 17.5 in (444.5 cm)
Transmission Rate	Far Detector (LS): 27.5 in (698.5 cm)
	20 frames /sec

**Waveform
Combinability**

Digital Telemetry Data
GR, CCL (Required), RADii CBT, Digital CBT

Measurements

Type	Neutron Porosity
Principle	Ratiometric Thermal Neutron Detection
Range	-3 to 60 porosity units
Vertical Resolution	Approximately 10 in (254 mm)
Depth of Invest.	Porosity dependent, 12 in or less (304.8 mm or less)
Accuracy (1SD)	± 2%
Primary Curves	Neutron API Units Near & Far Detector Count Rates
Secondary Curves	Detector Count Rate Ratio

Calibration

Primary	University of Houston API Neutron Pit
Secondary	Neutron Calibration Tank
Wellsite Verifier	350 µCi Active Verifier

¹Strengths apply to new tools at 70°F (21°C) and 0 psi.

* This tool must be run in conjunction with a 2.75 in Digital Gamma Ray tool. It cannot be run alone.

Version Control: 2021.12.09

On-line specifications are for REFERENCE ONLY and subject to change without notice. DO NOT USE FOR FIELD OPERATIONS.