


# GAMMA GUN - GEIGER MULLER - SINGLE FIRE - 1 11/16 IN.

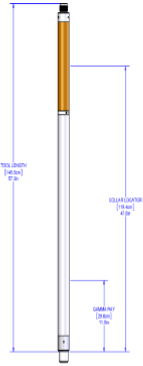

**SKU:** 050-GG170-0000

**Categories:** [Cased Hole Wireline](#), [Gamma Guns](#), [Perforating](#), [PTX](#), [Well Intervention](#)

## PRODUCT DESCRIPTION

### Ratings & Dimensions

<b>Max Temperature</b>	350°F (177°C) for 4 hours
<b>Maximum Pressure</b>	20,000 psi (138 MPa)
<b>Outer Diameter</b>	1.69 in (42.9 mm)
<b>Length</b>	60.3 in (1531.62 mm)
<b>Weight</b>	21.0 lb (9.5 kg)
<b>Min Csg/Tbg OD</b>	2.38 in (60.5 mm)
<b>Max Csg/Tbg OD</b>	7.0 in (178.0 mm)
<b>Sensor Depth Offset</b>	<b>Gamma Ray:</b> 12.5 in (317.5 mm) <b>Casing Collar Locator:</b> 53.9 in (1369.06 mm)

### Borehole Conditions

<b>Borehole Fluids</b>	No Restrictions
<b>Logging Speed</b>	<b>Maximum:</b> About 30 ft (9 m) /min to 45 ft (9 to14 m) /min
<b>Tool Positioning</b>	Centralized   Eccentralized

### Measurements

<b>Sensor Type</b>	<b>Gamma Ray</b> Geiger-Muller detector	<b>Casing Collar Locator</b> Dual Magnet, Center Coil
<b>Detection Type</b>	Gamma Radiation	Magnetic
<b>Principle</b>	Naturally Occurring Gamma	Magnetic Flux Variation
<b>Range</b>	0 to 5,000 cps	
<b>Data Transmission</b>	Analog, Pulse, + Polarity	Analog, Line Wobble, mV

**Calibration**

Approx. 1.0 cps /GAPI unit

NA

**Electrical Specifications****Cablehead Voltage**  
**Instrument Current**  
**Shooting Polarity**60 V Positive DC  
60 mA  
Negative

Version Control: 2022.02.17

---

***On-line specifications are for REFERENCE ONLY and subject to change without notice. DO NOT USE FOR FIELD OPERATIONS.***