Technical Specification Sheet

ProShooter™ Panel - Dump Fire - USB - Portable

The Probe ProShooter™ Panel is fully compliant with API RP-67 surface system requirements. It is Probe's rack-mounted shooting panel solutions for safely providing shooting voltage and current to all type of downhole detonating devices used in the oilfield. This version allows for portability.

General Specifications

Width	3.5 in (88.9 mm)
Height	19.0 in (482.6 mm)
Depth	14.0 in (355.6 mm)
Weight	28.8 lbs (13.1 kg)

Electrical Specifications

Power Supply	110 – 120V AC
Voltage Output	0 to 500 V (Open Circuit Voltage)
Current Output	0 to 2.0 A
Power Supply Freq	50-60 Hz Single Phase, 2 Wire plus Ground
Output Current	2.0 A
Output Ripple (rms)	<2% @ ±350 VDC 2 A
Output Noise (p-p)	<1% @ ±350 VDC 2 A
Max Power Output	400 W (Non-continuous, load dependent)

Environmental Specifications

Operating Temperature	14.0 to 131.0 °F (-10.0 to 55.0 °C)

Features

Portable
USB Interface Board
Dump-Fire Capability
Filter Board

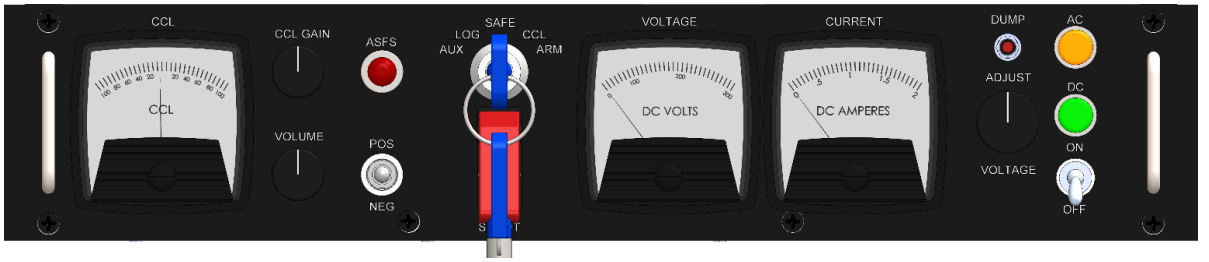

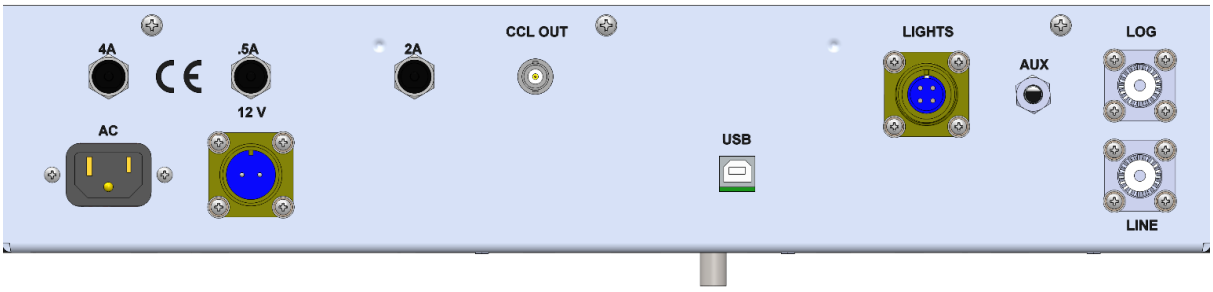

© Copyright 1994-2021 Probe Technologies Holdings, Incorporated. All Rights Reserved. | Specifications may change without notice. | 035-WAR00-PORT